

# WAVIRA


WAVIRA è un faretto da esterno architettonico quadrato ad alte prestazioni progettato per l'illuminazione di precisione di facciate, risalto strutturale e progetti paesaggistici per esterni su larga scala. Caratterizzato da una robusta struttura in alluminio pressofuso, flessibili varianti di distribuzione del fascio multi-angolo e una staffa orientabile durevole, offre un'illuminazione affidabile e ad alta efficienza su misura per ambienti architettonici esigenti.




WAVIRA is a high-performance square architectural exterior spotlight engineered for precision facade illumination, structural highlighting, and large-scale outdoor landscape projects. Featuring robust die-cast aluminum construction, flexible multi-angle beam distribution variants, and a durable adjustable bracket, it delivers reliable, high-efficiency illumination tailored for demanding architectural environments.




## Description






**Housing -** High-grade aluminum construction with Tiger powder spraying surface treatment. Designed for outdoor adjustable bracket installation
**Diffuser -** High-performance optical lens with precise beam control.
**Reflector -** Precision beam control (10°, 15°, 25°, 36°, 55°) Elliptical light.
**LED** - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
**Standards** - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

| Model | Power | Illuminance | Size(mm) |
|---|---|---|---|
| WAVIRA-6 | 6W | 600Lm | Ø65-65-55-99mm |
| WAVIRA-12 | 12W | 1200Lm | Ø105-105-82-148mm |
| WAVIRA-24 | 24W | 2400Lm | Ø130-130-82-178mm |
| WAVIRA-30 | 30W | 3000Lm | Ø160-160-82-218mm |
| WAVIRA-36 | 36W | 3600Lm | Ø185-185-90-247mm |

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

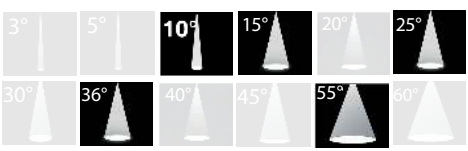

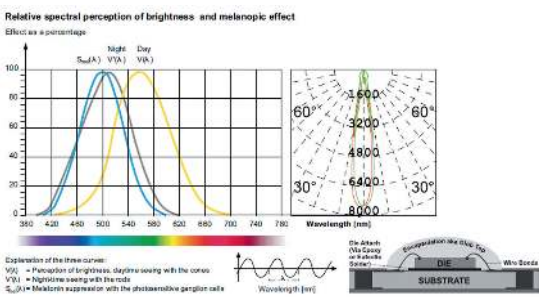
CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.