
ZAIERA

ZAIERA è un paletto luminoso architettonico a sezione rettangolare caratterizzato da una testa sporgente a cupola per un'illuminazione direzionale verso il basso, progettata per un'illuminazione confortevole e precisa di vialetti e aree verdi. Progettato per alte prestazioni, unisce una tecnologia LED avanzata a una resistente struttura in alluminio trattata con verniciatura a polvere Tiger o finitura effetto legno.

ZAIERA is an architectural rectangular-profile bollard light featuring an overhanging hooded head for downward directional illumination, designed for comfortable and precise pathway and landscape lighting. Engineered for high performance, it combines advanced LED technology with a durable aluminum construction treated with Tiger powder coating or realistic wood grain finish.




Description

Housing - High-grade aluminum construction with Tiger powder spraying surface treatment, engineered for superior outdoor durability and corrosion resistance.
Diffuser - High-transmittance diffuser with a 360-degree radial ring for uniform omnidirectional distribution.
Reflector - Precision beam control (Elliptical light / Asymmetric).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)
ZAIERA-5	5W	500Lm	34-124-260mm (Head:120 x 69mm)
ZAIERA-8	8W	800Lm	34-124-560mm (Head:120 x 69mm)
ZAIERA-13	13W	1300Lm	34-124-760mm (Head:120 x 69mm)

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

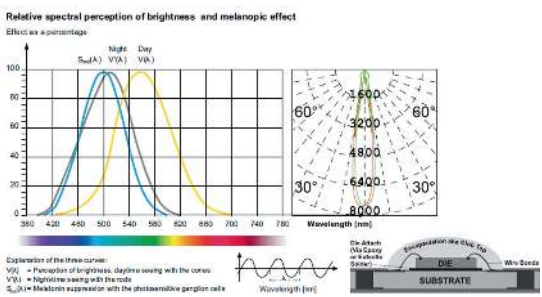

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.