
ZEN

ZEN Spot Light combina un design minimalista con un'illuminazione mirata, creando un'atmosfera rilassante e sofisticata negli interni contemporanei. Le sue linee pulite e l'aspetto raffinato lo rendono ideale per l'illuminazione d'accento, per valorizzare elementi architettonici e dettagli decorativi. Adatto ad applicazioni residenziali, commerciali, retail e hospitality. Grazie alla sua eleganza discreta e alle prestazioni illuminotecniche versatili, ZEN offre una soluzione luminosa funzionale e raffinata per i progetti moderni.



ZEN Spot Light combines a minimalist design with focused illumination, creating a calm and sophisticated atmosphere in contemporary interiors. Its clean lines and refined appearance make it ideal for accent lighting, highlighting architectural features, and enhancing decorative details. Suitable for residential, commercial, retail, and hospitality applications. With its understated elegance and versatile lighting performance, ZEN offers a functional and stylish solution for modern lighting projects.





Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)	Cutout
ZEN	10W	1000Lm	Ø100×H84mm	67mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

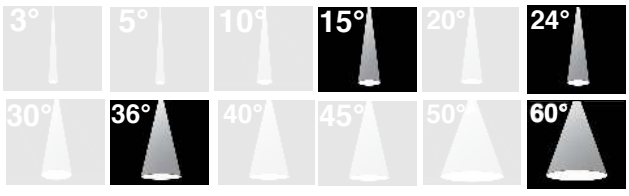

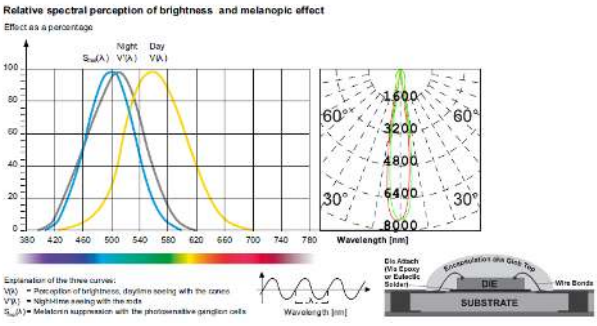

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

LED | IP20 IP44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.