
ZENITH SPOT SM

ZENITH SPOT SM è caratterizzato da un design elegante a profilo ribassato montato in superficie, progettato per applicazioni architettoniche moderne. Realizzato con ottiche diffuse ad alte prestazioni, offre un'illuminazione ampia e uniforme, un comodo controllo antiriflesso e prestazioni affidabili, garantendo un profilo del soffitto continuo e un superiore comfort visivo per gli ambienti contemporanei.

ZENITH SPOT SM features a sleek, surface-mounted low-profile design engineered for modern architectural applications. Crafted with high-performance diffused optics, it offers broad, uniform illumination, comfortable anti-glare control, and reliable performance—delivering a seamless ceiling profile and superior visual comfort for contemporary environments.







Description


Housing - High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating (White/Black). Designed for surface-mounted installation.
Diffuser - High-performance optical diffuser with 60° beam angle for broad, uniform illumination.
Reflector - Anodized aluminum with precision beam control (60°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)
ZENITH SPOT SM9	7W	900Lm	Ø72.5-30mm
ZENITH SPOT SM12	12W	1200Lm	Ø92.5-30mm
ZENITH SPOT SM15	15W	1500Lm	Ø113-30mm
ZENITH SPOT SM24	24W	2400Lm	Ø142-30mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k



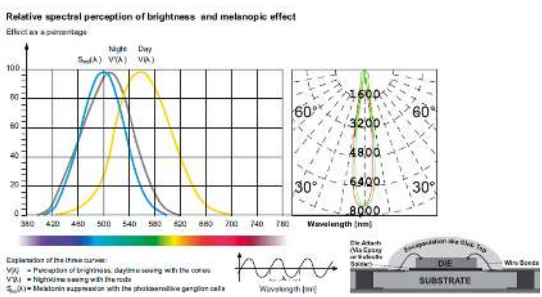

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.