
ELORA

ELORA Down Light offre un'illuminazione precisa e uniforme con un design elegante e contemporaneo.
La tecnologia LED avanzata garantisce un'eccellente efficienza luminosa riducendo al minimo i consumi energetici.
Ideale per applicazioni architettoniche, commerciali, retail, hospitality e residenziali.
Combinando prestazioni affidabili, estetica raffinata e lunga durata, ELORA crea ambienti illuminati con comfort ed eleganza.



ELORA Down Light offers precise and uniform illumination with an elegant, contemporary design.
Its advanced LED technology delivers excellent luminous efficiency while minimizing energy consumption.
Ideal for architectural, commercial, retail, hospitality, and residential applications.
Combining reliable performance, refined aesthetics, and long-lasting durability, ELORA creates comfortable and sophisticated lighting environments.




Description


Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency : Lm/W , UGR < 19)
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Cutout
ELORA 5	5W	500Lm	Ø63mm×H53mm	Ø55mm
ELORA 10	10W	1000Lm	Ø83mm×H60mm	Ø75mm
ELORA 15	15W	1500Lm	Ø105mm×H66mm	Ø95mm
ELORA 20	20W	2000Lm	Ø128mm×H78mm	Ø115mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

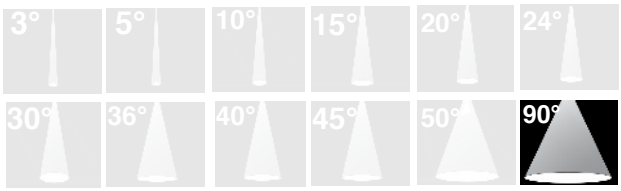

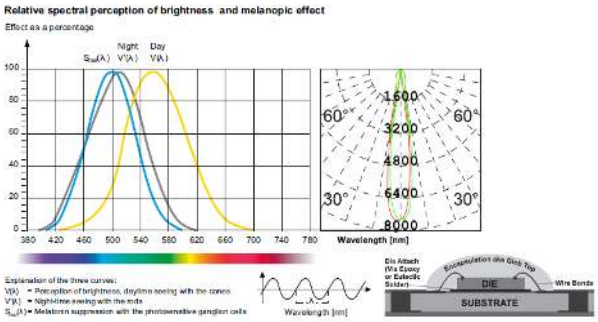

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

LED | IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.