
SONIT SF

SONIT SF è caratterizzato da un design cilindrico ed elegante montato in superficie, progettato per applicazioni architettoniche moderne. Realizzato con ottiche ad alte prestazioni, offre una luminosità uniforme, un controllo antiriflesso a incasso profondo e un'illuminazione affidabile, garantendo un profilo del soffitto lineare e un superiore comfort visivo per gli ambienti contemporanei.

SONIT SF features a sleek, surface-mounted cylindrical design engineered for modern architectural applications. Crafted with high-performance optics, it offers uniform brightness, deep-recessed anti-glare control, and reliable illumination—delivering a streamlined ceiling profile and superior visual comfort for contemporary environments.






Description


Housing - High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating (White/Black/White+Black). Designed for surface-mounted installation.
Diffuser - Deep-recessed optical lens.
Reflector - Anodized aluminum with precision beam control (15°/24°/38°/55°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)
SONIT SF128014	12W	1200Lm	Ø72-88mm
SONIT SF209014	20W	2000Lm	Ø94-95mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

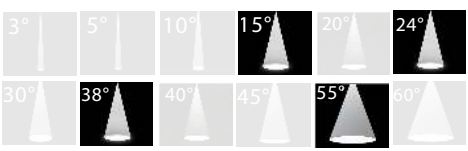

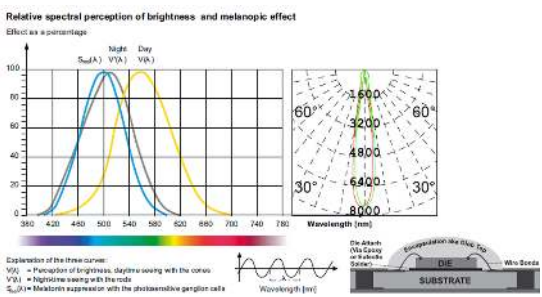

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.